



ORDERING INFORMATION


CAS-BNC-T | Assembly Case





ASSEMBLY INSTRUCTION

Rear Twist BNC - "Large" | 75Ω Cable Connector - Crimp version

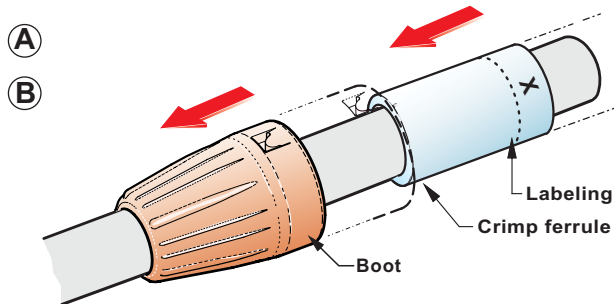


A Slide the boot onto the cable
- Position the labeling to the cable end

B Slide the crimp ferrule onto the cable


C Prepare cable as shown
- Use an adjustable coaxial cable stripper

D Spread the braided shield
- slide the spacer onto the center conductor

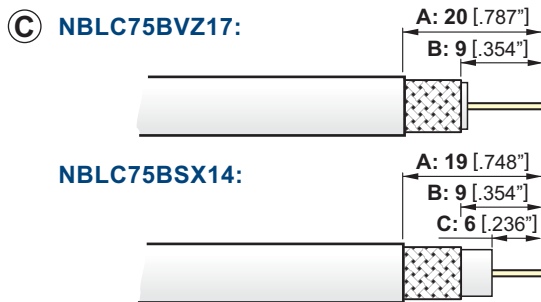




E Crimp the pin

- position the pin on the center conductor
 - crimp the pin with the tool
- (For best crimping-results it is recommended to use the original Neutrik crimp tool
- HXBNC with the corresponding insert
or hexcrimp acc. to IEC 803-W (SW 1.75)
or squarecrimp acc. to IEC 803-2 (SW 1.6)
- Pin can also be soldered (Optional)!
 - Straighten the pin if misaligned.

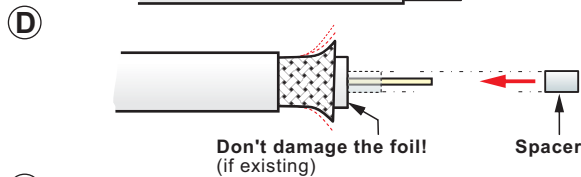

F Insert the cable into the connector body

G Slide the crimp ferrule over the shield to the front and push the cable and leading ferrule to its end position until you hear a snap noise.

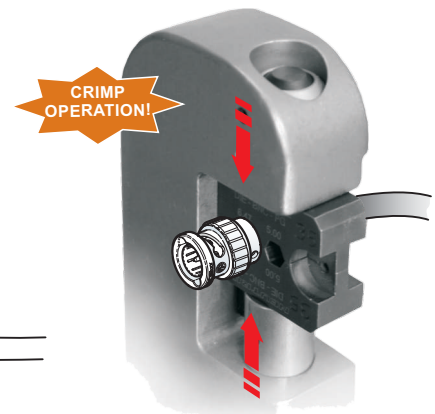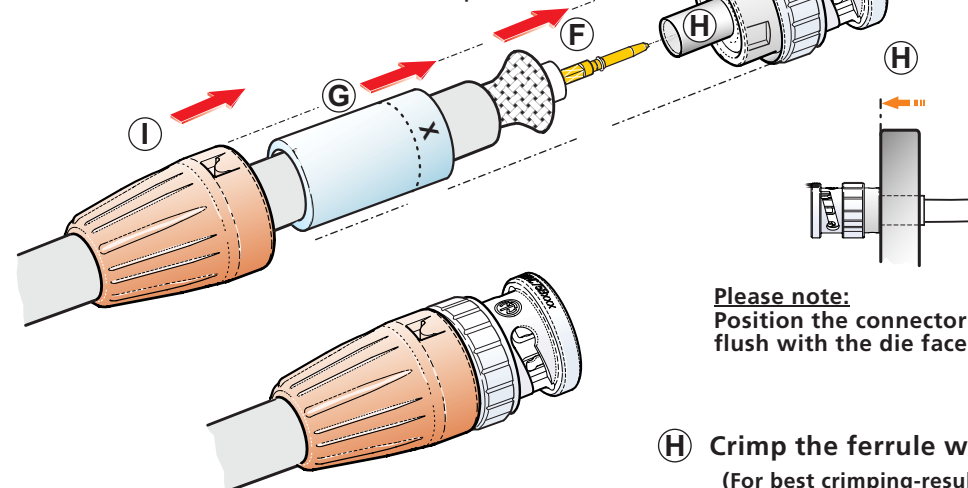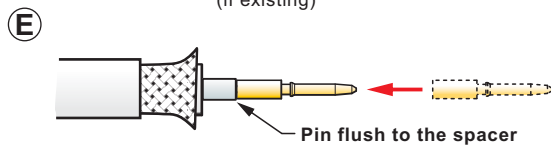

Please note:
Position the connector body flush with the die face.

H Crimp the ferrule with the tool

(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)

I Snap the boot onto the connector body



Document No.: BDA 144 V2
3102M1351
Date: 2025-08-21
Neutrik AG | LI-9494 Schaan
www.neutrik.com

Data subject to change without prior notice. © 2025 NEUTRIK®. NEUTRIK®, powerCON are registered trademark of Neutrik AG. ALL RIGHTS RESERVED.

NEUTRIK
A brand of the Neutrik Group