



opticalCON DUO X-TREME

Assembled, 2 channel X-TREME cable offering a cut-proof and rodent resistant double jacket glass yarn armored cable construction. Excellent cable retention due to aramid yarn, black PUR outer jacket.

The opticalCON DUO cable connector accommodates a standard optical LC-Duplex connector in a ruggedized and durable all-metal housing. It features a spring loaded push-pull locking mechanism and an excellent cable retention utilizing aramid yarn. The optical connection is exceptional well protected against dirt and dust by an automatically operated sealing cover.


The cable connector comes pre-assembled and is not available as a single component. The cable is available in different lengths and is packed either in a case, on drum or airspool.

Features & Benefits

- ✓ opticalCON X-TREME cable for demanding applications like touring / rental or outdoor broadcast
- ✓ opticalCON multimode fiber cables offer laser and bend optimized OM3 fibers
- ✓ Offering a cut-proof and rodent resistant double jacket glass yarn armored cable construction
- ✓ Rugged and dirt protected 2 channel fiber optic connection system
- ✓ Excellent dust and dirt protection due to automatic sealing shutter with silicone gasket
- ✓ Accommodates standard optical LC-Duplex connectors

- ✓ Reliable Push-Pull locking mechanism
- ✓ Dust and water resistant according to IP65 in mated condition
- ✓ Easy to clean, no special tools required
- ✓ Available in different packaging versions

Cable cross section

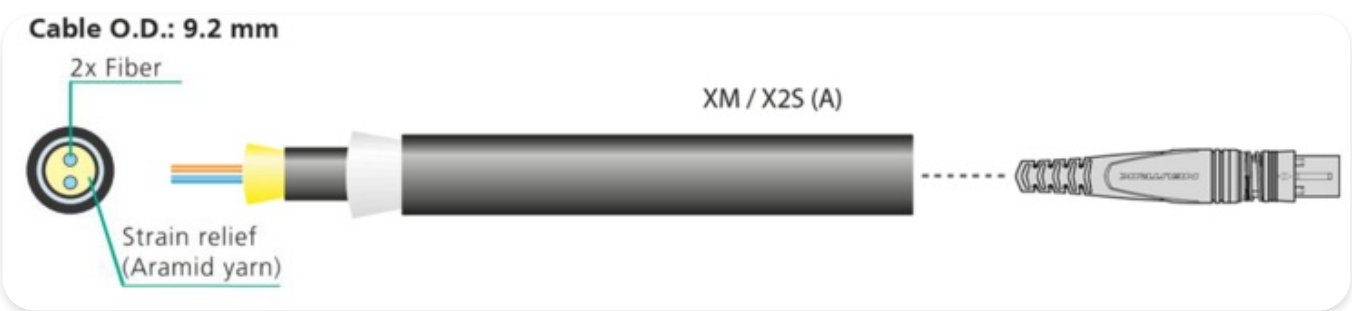


Packaging options and max. cable length

							
	0 Airs pool	1 opticalCON Case	2 Drum Schill GT310	3 Drum Schill GT380	4 Drum Schill HT582	5 Drum Schill GT450	6 Drum Schill SK4812
Wide	-	490 mm / 19.3"	ø 310 mm / 12.2"	ø 380 mm / 15.0"	ø 580 mm / 22.0"	ø 445 mm / 17.6"	518 mm / 20.4" ø 460 mm / 18.1"
High	-	340 mm / 13.4"	NOT AVAILABLE 230 mm / 9.1"	491 mm / 19.3"	710 mm / 28.0"	555 mm / 21.8"	562 mm / 22.1"
Depth	-	150 mm / 5.9"	230 mm / 9.1"	303 mm / 11.9"	271 mm / 10.6"	312 mm / 12.2"	422 mm / 16.6"
Weight	-	1.5 kg	2.2 kg	4.7 kg	13.9 kg	5.4 kg	16.7 kg

opticalCON Features



opticalCON DUO logo

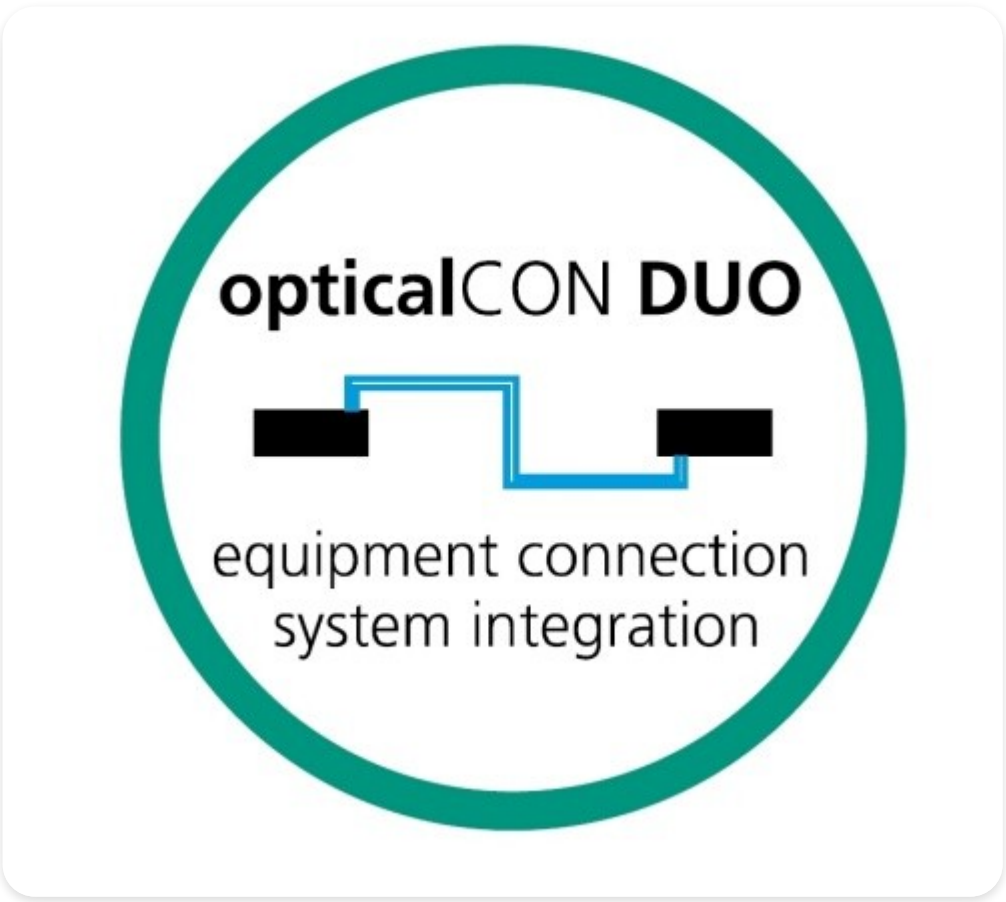

Technical Information

Product	
Title	opticalCON DUO X-TREME
Connection Type	opticalCON
Gender	male

Mechanical

Cable retention	500 N
Insertion force	< 45 N
Withdrawal force	< 45 N
Lifetime (typ.)	5000 mating cycles
Wiresize	
Locking device	Push-Pull

Material

Boot	Rubber (EPDM)
Bushing	Zinc diecast (ZnAl4Cu1)
Insert	Polyamide (PA 6, PBT 30 % GR, PBT 50 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Strain relief	POM (brass)

Environmental

Temperature range	-40°C to +75 °C
Protection class	in mated condition IP65

Optical

Insertion loss	< 0.5 dB / connection
Optical wiring	ISO / IEC 11801

Mobile cable	
Colour	black, matte
Core diameter	Single mode 9 µm, Multimode 50 µm
Cladding diameter	125 µm
Comment	PUR
minimal bending radius	10 cm
Number of fibers	2
Cable retention	Aramid Yarn
Weigth	82 kg/km
Overall diameter	9.2 mm
Outer shield	Coated glass yarn