




Cable O.D.: 7.0 mm

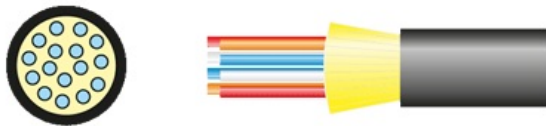

## opticalCON MTP® 16 Cable

Assembled, rugged and lightweight 16-channel mobile field cable, excellent cable retention due to aramid yarn, black PUR outer jacket, available in single mode (APC).

The opticalCON MTP® cable connector accommodates 16 optical fibers (single mode APC) based on conventional and proven MTP® connectivity protected by a ruggedized and durable all-metal housing. It features a spring loaded push-pull locking mechanism and an excellent cable retention utilizing aramid yarn. The optical connection is exceptional well protected against dirt and dust by an automatically operated sealing cover.


The cable connector comes pre-assembled and is not available as a single component. The cable is available in different lengths and is packed either in a case, on drum or airspool.

### Features & Benefits

- Ruggedized and dirt-protected 16-channel fiber optic connection system
- Cable connector features rugged metal housing and heavy-duty cable retention
- Dust and water resistant according to IP65 in mated condition
- Reliable Push-Pull locking mechanism
- For point-to-point multichannel routing based on MTP® technology
- Spherical shutter guarantees low maintenance
- Easy to clean, no special tools required
- Cable connector comes pre-assembled with a choice of mobile field cables

## Cable cross section

Cable O.D.: 7.0 mm

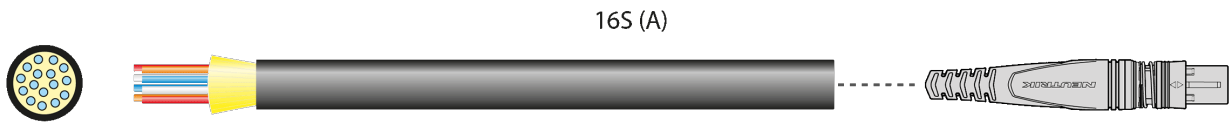

## Packaging options and max. cable length



	0 Airspool	1 opticalCON Case	2 Drum Schill GT310	3 Drum Schill GT380	4 Drum Schill HT582	5 Drum Schill GT450	6 Drum Schill SK4812
<b>Wide</b>	-	490 mm / 19.3"	ø 310 mm / 12.2"	ø 380 mm / 15.0"	ø 580 mm / 22.0"	ø 445 mm / 17.6"	518 mm / 20.4" ø 460 mm / 18.1"
<b>High</b>	-	340 mm / 13.4"	<b>NOT AVAILABLE</b> 230 mm / 9.1"	491 mm / 19.3"	710 mm / 28.0"	555 mm / 21.8"	562 mm / 22.1"
<b>Depth</b>	-	150 mm / 5.9"	230 mm / 9.1"	303 mm / 11.9"	271 mm / 10.6"	312 mm / 12.2"	422 mm / 16.6"
<b>Weight</b>	-	1.5 kg	2.2 kg	4.7 kg	13.9 kg	5.4 kg	16.7 kg

## Technical Information

Product	
Title	opticalCON MTP® 16 Cable

Mechanical	
Cable retention	> 500 N
Insertion force	< 45 N
Withdrawal force	< 45 N
Lifetime (typ.)	2'500 mating cycles
Locking device	Push-Pull

Material	
Boot	Rubber (EPDM)
Bushing	ZnAl4Cu1
Insert	Polyamide (PA 6, PBT 30 % GR, PBT 50 % GR)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Black chromium
Strain relief	Brass (CuZn39Pb3) + PU, Ni

Environmental	
Temperature range	-40 °C to +75 °C
Protection class	in mated condition IP65

**Optical**

<b>Insertion loss</b>	< 0.9 dB
<b>Optical connector</b>	MTP® female
<b>Optical wiring</b>	Method A

**Mobile cable**

<b>Colour</b>	black, matte
<b>Core diameter</b>	Singlemode 9 µm
<b>Cladding diameter</b>	125 µm
<b>Comment</b>	PUR
<b>Minimal bending radius</b>	8.2 cm
<b>Number of fibers</b>	16
<b>Cable retention</b>	Aramid yarn
<b>Weight</b>	43 kg/km
<b>Overall diameter</b>	7.0 mm