




ASSEMBLY INSTRUCTION

BNC | 75Ω Cable Jack Panel Version - Tiny

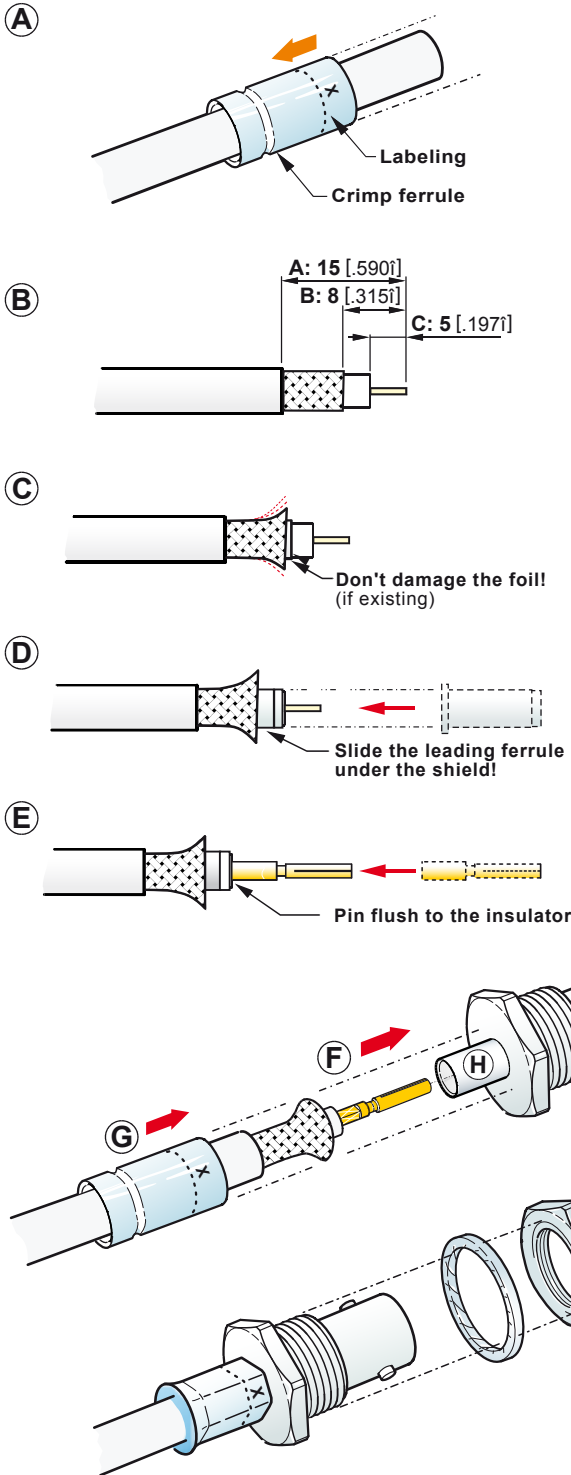

- A** Slide the crimp ferrule onto the cable
- Position the labeling to the cable end
- B** Prepare cable as shown
- Use an adjustable coaxial cable stripper
- C** Spread the braided shield
(It's easily with the Neutrik "SHIELD-SPREADING-TOOL"!)
- Don't damage the foil! (if existing)
- D** Slide the leading ferrule on the cable
- E** Crimp the pin
- position the pin on the center conductor
- Crimp the pin with the tool
(For best crimping-results it is recommended to use the original Neutrik crimp tool
- HXBNC with the corresponding insert or hexcrimp acc. to IEC 803-W (SW 1.7) or squarecrimp acc. to IEC 803-2 (SW 1.6)
- Pin can also be soldered (Optional!)
- Straighten the pin if misaligned.
- F** Insert the cable into the connector
- G** Slide the crimp ferrule over the shield to the front and push the cable and leading ferrule to it's end position until you hear a snap noise.
- H** Crimp the ferrule with the tool
(For best crimping-results it is recommended to use the original Neutrik tool - HXBNC with the corresponding insert)

Please note:
Position the connector body flush with the die face.

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93
 NEUTRIK Zürich AG CH T: +41 44 / 736 5010 F: +41 44 / 736 5011
 NEUTRIK USA Inc. USA T: +1 732 / 901 9488 F: +1 732 / 901 9608
 NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830
 NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
 NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
 NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052

Draft. Nr.: BDA 130/ 3102M1251 | Update: 02.04.2009 | Data subject to change without prior notice. ©2009 NEUTRIK®. ALL RIGHTS RESERVED.

www.neutrik.com

NEUTRIK